


OPERATORS

TRACK OPTIONS

CHAMBERLAIN®

Model T 50 11

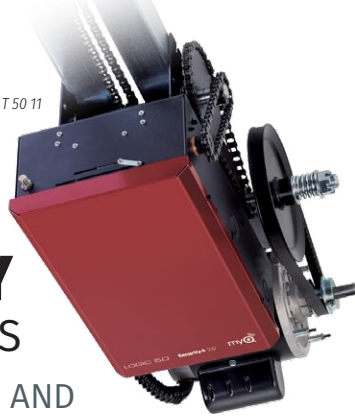

TROLLEY OPERATORS

LIGHT, MEDIUM AND INDUSTRIAL-DUTY MODELS

- Standard Radius or Low Headroom Track
- Available for High Cycle Usage
- Multiple Horsepower Options (1/2, 3/4, 1 HP)
- Available up to 24' High Doors

JACKSHAFT OPERATORS


MEDIUM AND INDUSTRIAL-DUTY MODELS

- High Lift or Vertical Lift Track
- Available for High Cycle Usage
- Multiple Horsepower Options (1/2, 3/4, 1 HP)



Model J 50 11


STANDARD RADIUS

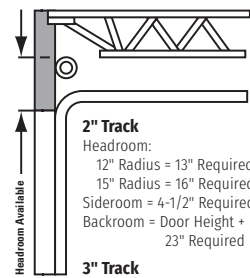

2" Track
 Headroom: 12" Radius = 13" Required
 15" Radius = 16" Required
 Sideroom = 4-1/2" Required
 Backroom = Door Height + 23" Required

3" Track
 Headroom = 18" Required
 Sideroom = 5-1/2" Required
 Backroom = Door Height + 25" Required


LOW HEADROOM FRONT MOUNT

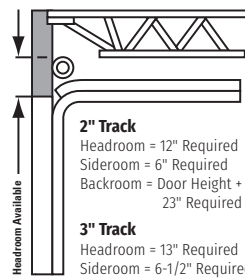

2" Track
 Headroom = 12" Required
 Sideroom = 6" Required
 Backroom = Door Height + 23" Required

3" Track
 Headroom = 13" Required
 Sideroom = 6-1/2" Required
 Backroom = Door Height + 25" Required
 (1,200 lb. limit on door weight)


LOW HEADROOM REAR MOUNT

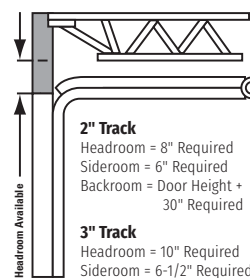

2" Track
 Headroom = 8" Required
 Sideroom = 6" Required
 Backroom = Door Height + 30" Required

3" Track
 Headroom = 10" Required
 Sideroom = 6-1/2" Required
 Backroom = Door Height + 32" Required
 (800 lb. limit on door weight)


VERTICAL LIFT

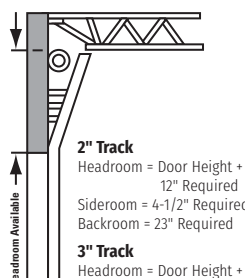

2" Track
 Headroom = Door Height + 12" Required
 Sideroom = 4-1/2" Required
 Backroom = 23" Required

3" Track
 Headroom = Door Height + 12" Required
 Sideroom = 5-1/2" Required
 Backroom = 23" Required

HIGH LIFT

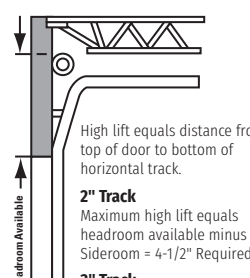


High lift equals distance from top of door to bottom of horizontal track.

2" Track
 Maximum high lift equals headroom available minus 14"
 Sideroom = 4-1/2" Required

3" Track
 Maximum high lift equals headroom available minus 15"
 Sideroom = 5-1/2" Required
 (Minimum high lift = 12" Required)

ROOF PITCH

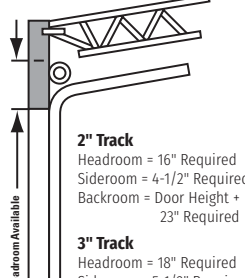


2" Track
 Headroom = 16" Required
 Sideroom = 4-1/2" Required
 Backroom = Door Height + 23" Required

3" Track
 Headroom = 18" Required
 Sideroom = 5-1/2" Required
 Backroom = Door Height + 25" Required

Headroom = Top of door to nearest obstruction (truss)

Note: Up to 4" of additional headroom may be required for a trolley door opener.

Design & Buy™

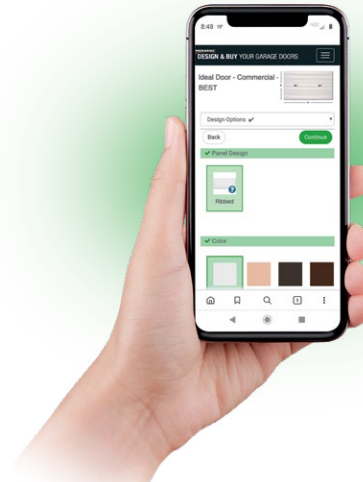

CUSTOMIZE YOUR GARAGE DOOR!

Choose your door style, width, height, color, windows, track, hardware and MORE!

Open camera and point!



Visit your local store or buy now on

MENARDS®
 .COM

IDEALDoor®

GARAGE DOORS

AMERICAN MADE FOR OVER 50 YEARS

Calculated door section R-values are in accordance with DASMA TDS-163. In the interest of better quality and value, we are continually improving and updating our products. Consequently, photos, illustrations and available options may sometimes differ from present models. Ideal Door® is a brand of Clopay Corporation. ©2021 Clopay Corporation. All rights reserved.

REID - COMMBR-20_REV0121

IDEALDoor®

GARAGE DOORS


COMMERCIAL
 STEEL PANEL



BEST

BETTER

GOOD

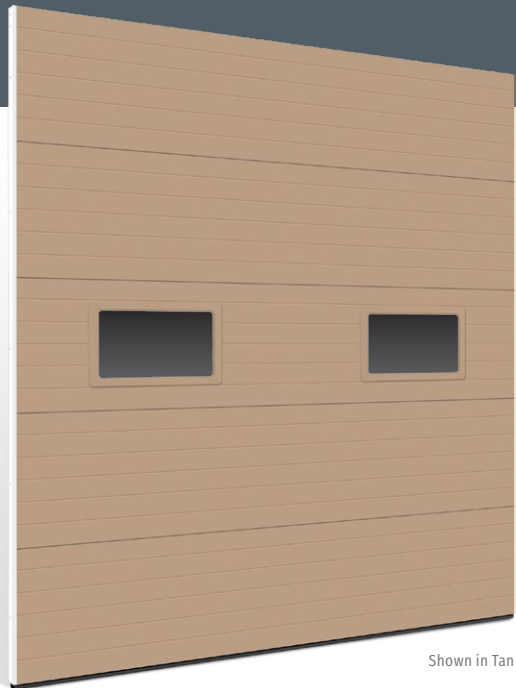

Shown in Tan

COMMERCIAL STEEL PANEL

SECTIONAL COMMERCIAL DOORS FOR EVERY TYPE OF BUILDING

Perfect for post frame buildings, storage sheds, oversize garages and commercial buildings. Commercial Steel Panel garage doors provide excellent temperature control, energy efficiency and long-lasting service for a wide range of applications.

- BEST construction features Intellicore® insulation to provide maximum energy efficiency
- Ribbed panel designs improve the appearance of your building

3-LAYER CONSTRUCTION
STEEL + INTELLICORE® INSULATION + STEEL



18.4 **2"**
16.2 **1-3/4"**
R-VALUE **intell**
Warmer, Quieter, Stronger.

12.9 **1-3/8"**
R-VALUE **intell**
Warmer, Quieter, Stronger.

PANEL DESIGNS



Ribbed Panel Design

WINDOWS



24" x 12"



24" x 8"

COLORS



White Tan Mocha Brown*



Chocolate Gray Charcoal

Due to the printing process, colors may vary.

WARRANTIES



3-LAYER CONSTRUCTION
STEEL + INSULATION + STEEL



9.0 **2"**
R-VALUE POLYSTYRENE

6.5 **1-3/8"**
R-VALUE POLYSTYRENE

PANEL DESIGNS



Ribbed Panel Design

WINDOWS



24" x 12"



24" x 8"

COLORS



White Tan Mocha Brown*



Chocolate Gray Charcoal*

Due to the printing process, colors may vary

* Available only on 1-3/8" BETTER models

† Available only on 2" BETTER models

WARRANTIES




2 & 1-LAYER CONSTRUCTION
STEEL + INSULATION STEEL (NON-INSULATED)



6.5 **1-3/8"**
R-VALUE VINYL-BACKED POLYSTYRENE

PANEL DESIGNS

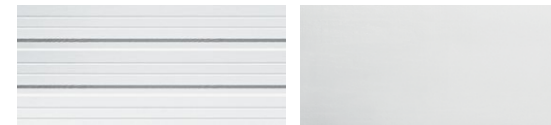

Deep Ribbed Panel Design

Flush Panel Design

WINDOWS



24" x 12"



24" x 6"

COLORS



White Tan



Chocolate Gray

Due to the printing process, colors may vary.

WARRANTIES

