

INSTALLATION INSTRUCTIONS

Strap Hinge

PARTS LIST:

No.	Qty.	Description
1	1	Black Strap Hinge
2	2	#8x1/2" Black Phillips-Head Pan Screws
3	3	1/2" Round Vinyl Cap

NOTE: This installation can be performed once the door is installed.

Step 1

Locate strap hinge in desired location between the section joint and the upper end of the emboss.

Step 2


Using the strap hinge as a template, drill through the center hole using a 1/8" drill bit.

Step 3

Take a #8x1/2" Phillips-head screw and fasten through the strap hinge and hole drilled in Step 2.

NOTE:

Ensure hinge location does not interfere with stop mold. Interference can cause damage to stop mold.

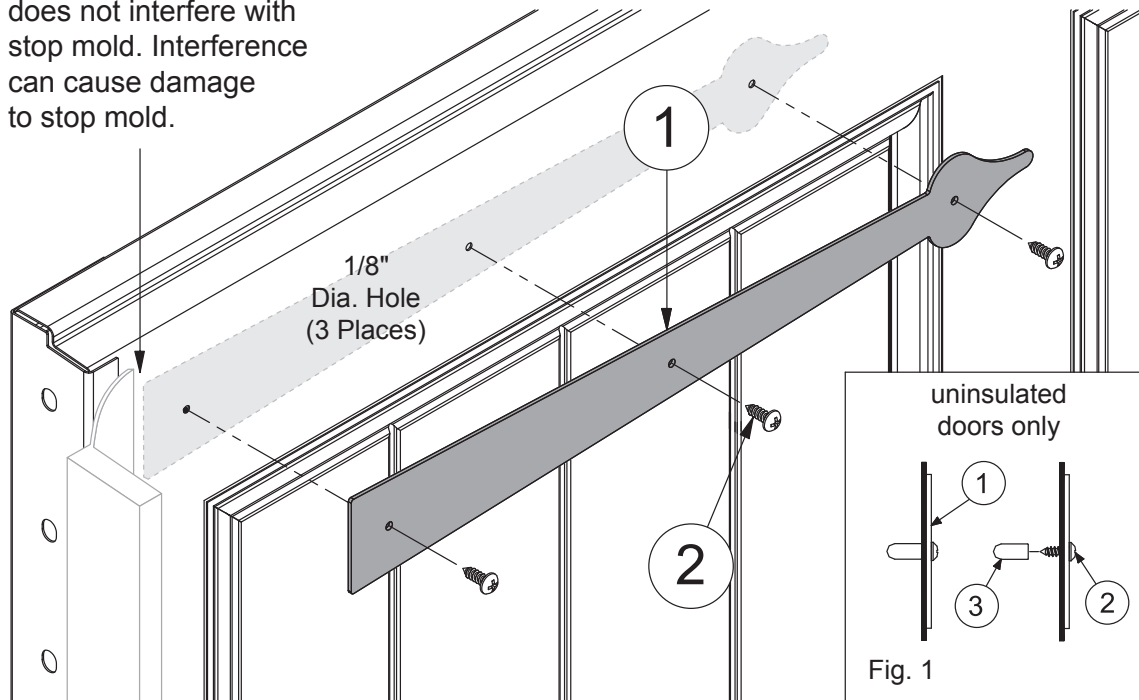


Step 4

Again, using the strap hinge as a template, drill the other 2 holes in the section and take a #8x1/2" Phillips-head screw and fasten into each hole through the strap hinge and section.

NOTE: All holes must be drilled from the outside through the door and insulation, if applicable, with a sharp drill bit to ensure a clean cut. Use care to prevent damaging the door.

NOTE: Maximum drill size is 1/8" drill (.125").

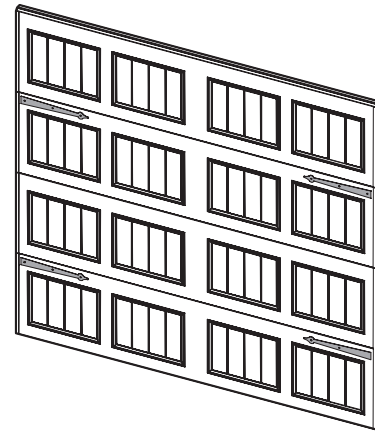

IMPORTANT: Vinyl safety caps must be installed on uninsulated doors. See Fig. 1.